arXiv:1304.5761v1 [cond-mat.mes-hall] 21 Apr 2013

Superconducting flux-flow type ultrasensitive magnetic sensors - An alternative to dc-SQUIDs

Roberto Monaco
Istituto di Cibernetica del CNR, Comprensorio Olivetti, 80078 Pozzuoli, Italy
and Facoltà di Scienze, Università di Salerno, 84084 Fisciano, Italy[a)]

(Dated: 23 April 2013)

Based on recent works[1-3], with this note I present a new class of superconducting ultrasensitive wideband high-dynamics magnetometers based on the magnetic field dependence of the Eck step voltage in long Josephson tunnel junctions (LJTJs). The sensor principle is to capture the flux related to the field to be measured by means of a superconducting loop, perpendicular to the applied field. Then a shielding current circulates in the loop to conserve the flux. If this loop has a narrow constriction, the circulating current density will become relatively high and will locally create a magnetic field large enough to bring a biased LJTJ in the flux flow state, i.e., at a finite voltage. It turned out that the performances of such sensor, among which a magnetic spectral density $S_B^{1/2} = O(fT/\sqrt{Hz})$, despite its simplicity, are comparable to those of the best present-day dc-SQUIDs. Experiments are in progress. Therefore, at this stage, comments on the proposed magnetometer and hints for possible improvements of its performances will be welcome.

Let us consider a superconducting thin-film planar loop with a constriction that overlaps with a spaced superconducting patch underneath. The top view of this system is schematically shown in Fig.1, where the square loop is drawn in dark gray and the patch in light gray. If the system is immersed in a uniform magnetic field, $H_\perp$, perpendicular to the loop plane, the external magnetic flux linked to loop is $\Phi_e = \mu_0 H_\perp A_p$, where μ_0 is the vacuum magnetic permeability and A_p is the flux capture area of the loop (we have assumed that no flux was trapped in the loop during the cool down). Denoting with L_p the pick-up loop inductance and with w the constriction width, the shielding current, I_{cir}, which circulates in the loop to restore the initial flux[4], is $I_{cir} = \mu_0 H_\perp A_p / L_p$. If the superconducting sheet underneath the constriction is large enough to act as a ground plane, then an in plane magnetic field, $H_{||} = I_{cir}/w \propto H_\perp$, exists in between the constriction and the ground plane. By propely designing the loop and its constriction, the proportionality factor, $K = \mu_0 A_p / w L_p$, can be larger than 10^3; in other words, the constricted loop behaves as an efficient transverse to in-plane magnetic field converter[5]. If a device sensitive to the in-plane magnetic field is placed in between the constriction and the underlying patch, it is then possible to measure the applied transverse field. Within the context of superconducting thin films, the most obvious detector choice is a Josephson junction. Recently[2], a magnetometer was proposed in which any change in the transverse field was measured by the variation of the critical current, I_c, of a Josephson tunnel junction. The best performance was achieved by using a one-dimensional long Josephson tunnel junction (LJTJ) whose width W is smaller and whose length L is larger than the Josephson penetration length, $\lambda_J \equiv \sqrt{\Phi_0 / 2\pi\mu_0 d_m J_c}$, setting the length unit of the LJTJ; Φ_0 is the magnetic flux quantum, J_c the junction critical current density and d_m the junction magnetic thickness[6]. A theoretical analysis of this system, corroborated by experiments, has been also reported[1] in which the static sine-Gordon equation[7] for a one-dimensional in-line LJTJ has been coupled to the quantization[8] of the fluxoid in the doubly connected electrode.

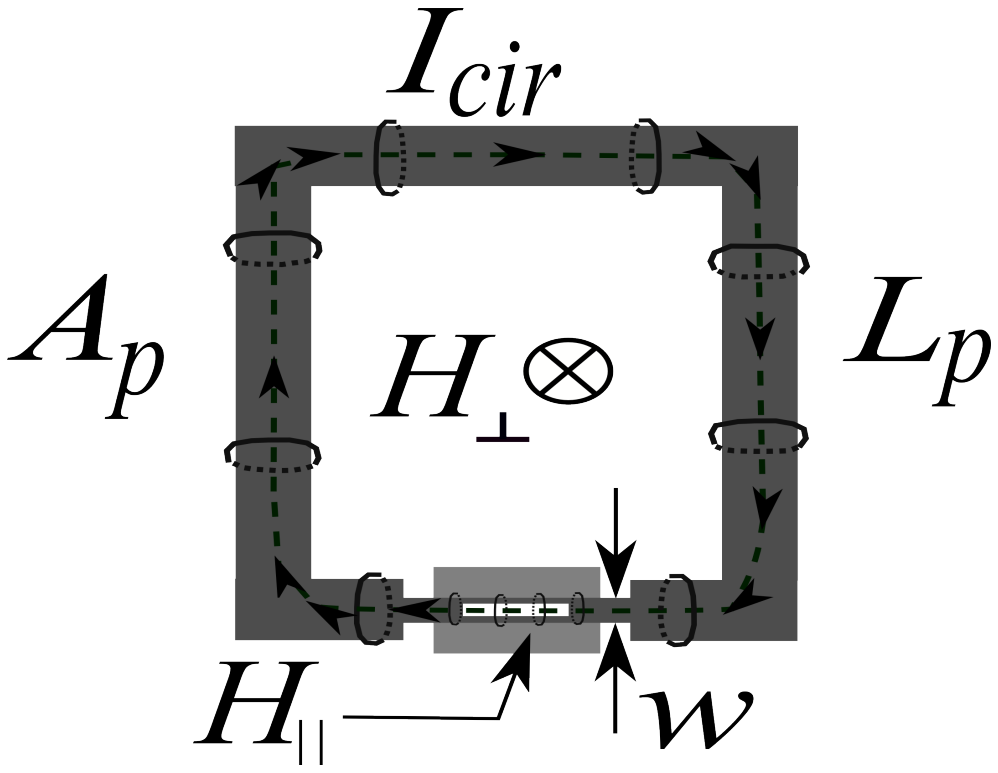

FIG. 1. Top view (not to scale) of a planar loop (dark gray) with a constriction overlaying a a spaced superconducting patch underneath (light gray). To realize the magnetometer a window-type long Josephson tunnel junction (sketched in white) is sandwiched between the loop constriction and the patch.

In presence of a in-plane magnetic field, a LJTJ behaves like an extreme type-II superconductor. For small fields it acts as a perfect diamagnet by establishing circulating screening currents which maintain the interior field at zero (Meissner effect); the Meissner regime is reflected by a linear decrease of I_c with weak magnetic fields which goes to zero at the critical field, $H_{c,||} = 2 J_c \lambda_j$, where magnetic vortices start to penetrate. The idea itself of a magnetic sensor based on LJTJs is interesting, and the proposed device has some advantages over the conventional sensors based on quantum interference: i) its design does not require any compromise between the loop and the junction parameters, ii) its embodiment does not

---

[a)] Electronic mail: r.monaco@cib.na.cnr.it

require any external electronics (such as input coil, modulation and feedback coil, flux transformer, tunable resonators and so on) and iii) its fabrication is fully compatible with any present low- and high-T$_c$ thin film technology developed for the fabrication of Josephson junctions. However, accuracy of the critical current measurement depends on the switching probability (or escape rate) caused by the thermal noise. It requires the acquisition of 10^4-10^5 switches by standard time-of-flight techniques[9,10], so limiting the use of the sensor only to static or slowly changing fields. If a broad-band sensor is needed, then a voltage response is required (in dc-SQUIDS this task is achieved by using shunted Josephson junctions).

Fortuitously, it turns out that the same device can also provide a high voltage responsivity, so keeping the above mentioned merit points and, at same time, showing superior performances. In fact, in presence of a magnetic field several time larger than its critical field, a LJTJ develops a steep current singularity, called flux-flow or Eck[11] step, at finite voltages of a fraction of the gap voltage. An autonomous flux-flow oscillator (FFO) is a LJTJ in which a unidirectional viscous flow of Josephson vortices (fluxons) occurs and coherent electromagnetic radiation is emitted from one of its ends where the fluxon chain collides with the boundary[12]; $1\,\mu W$ of power can be emitted in the frequency range 100-700$\,GHz$ within a $10\,MHz$ linewidth[14]. Indeed, the flux flow is a very well studied phenomenon that since long is being exploited for the realization of low noise integrated THz receivers[15]. The FFO voltage, V_{dc}, is determined by two independent stationary currents: one is referred to as the *control* current, I_{ctl}, which entirely flow in one of the junction electrodes and creates the magnetic field at the two ends of the junction, while the bias current, I_{dc}, applied through the tunneling barrier accelerates the fluxons and moves them from one junction extremity to the opposite one. In a proper magnetic field range the voltage of the flux flow step, in a first approximation, grows linearly with the in-plane magnetic field, $V_{dc} = \mu_0 d H_{||} u$, where u is the relativistic speed of fluxon train[12] that cannot exceed the Swihart velocity $\bar{c} = \lambda_J \omega_c$. Since the magnetic field is generated by a control current, I_{ctl}, in one of the junction electrodes (we know that it is preferable[3] to use the top electrode/wiring layer that typically has a larger inductance per unit length, $\mathcal{L} = \mu_0 d_m/w$), then $V_{dc} = \mathcal{L} u I_{ctl}$, resulting in a very simple expression for the so-called transresistance, $R_m \equiv dV_{dc}/dI_{ctl} = \mathcal{L} u$, usual in transistor-like devices[13]. (In passing, we observe that a transresistance of few ohms can be reasonably obtained[3] which would improve the gain of flux-flow current amplifiers[17].) Therefore, identifying the control current with the circulating current, $I_{ctl} = I_{cir}$, the voltage responsivity, $V_B \equiv dV_{dc}/dB$, to a transverse magnetic field density, $B = \mu_0 H_\perp$, of a FFO having a doubly connected electrode is

$$V_B = \frac{1}{\mu_0}\frac{dV_{dc}}{dH_\perp} = \frac{1}{\mu_0}\frac{dV_{dc}}{dI_{ctl}} \times \frac{dI_{ctl}}{dH_\perp} = \frac{R_m A_p}{L_p}. \qquad (1)$$

With a careful design, a responsivity larger than $1\,mV/\mu T$ can be achieved. The field range over which the responsivity stays constant corresponds to few times the transverse critical field, $B_c \equiv \mu_0 H_{c,||}/K = 2 J_c \lambda_j w L_p/A_p \propto 1/V_B$. The last expression has been experimentally tested[1–3]. [Introducing the reduced velocity $\bar{u} \equiv u/\bar{c}$, it is $B_c = 2\bar{u}\rho_N J_c/V_B$, where ρ_N is the junction normal resistance per unit area.] In addition, the dynamic range can be further increased by using a conventional flux-lock feedback to operate the device at its highest responsivity.

The ultimate performance of any device also depends on its noise and bandwidth. To estimate the value of the minimum detectable change of the external field, it is important to know the power spectral density, $S_B(\omega)$, of the intrinsic magnetic noise generated under working conditions. The noise in FFOs as been deeply studied, both analytically[20] and experimentally[21,22], since it determines the phase noise of the FFO radiation. The low-frequency ($\hbar\omega << 2eV_{dc}$) power spectral density, $S_V(\omega)$, of the intrinsic voltage fluctuation of a FFO is white with[23,24]:

$$S_V(0) = \frac{e}{\pi}\left(R_d + R_m\right)^2 \times$$
$$\left(2I_p \coth\frac{eV}{k_B T} + I_{qp}\coth\frac{eV}{2k_B T}\right) \qquad (2)$$

where e is the electron charge, $R_d \equiv dV_{dc}/dI_{dc}$ the dynamical resistance of the flux-flow step, k_B the Boltzmann constant, T the physical temperature, I_p and I_{qp} are the pair and the (temperature-dependent[25]) quasi-particle currents, respectively. Since for high-quality Niobium-based FFOs at LHe temperatures, $I_p > I_{qp}$ and $eV > k_B T$, setting $R_m \simeq R_d \approx 0.1\Omega$ and $I_p \approx 1mA$, the voltage amplitude spectral density turns out to be:

$$S_V^{1/2}(0) \simeq 2R_m\sqrt{\frac{2eI_p}{\pi}} \approx 2\,pV/\sqrt{Hz}. \qquad (3)$$

Ultimately, for the proposed magnetometer the low-frequency magnetic amplitude spectral density, in a first approximation, it is independent on the transresistance R_m and essentially determined by the loop ratio L_p/A_p.:

$$S_B^{1/2}(0) \equiv \frac{S_V^{1/2}(0)}{V_B} \simeq \frac{L_p}{A_p}\sqrt{\frac{2eI_p}{\pi}} \qquad (4)$$

For example, with $L_p/A_p \simeq 3\,nH/mm^2$ and I_p as before, we end up with $S_B^{1/2}(0) \approx 3fT/\sqrt{Hz}$.

In the proposed magnetometer there is another source of intrinsic noise given by the thermal noise of the loop that generates mean-square fluctuations, $<\delta I_{cir}^2>= k_B T/L_p$, on the circulating current which, in turns, are reflected on the noise in the step voltage. However, the current fluctuations $<\delta I_{ctl}^2>$ are order of magnitudes smaller than typical bias currents and therefore can be neglected. In the experiments, the fluctuation of the control current gives rise to an external noise source. For the stabilization of the operating field, as it was customary

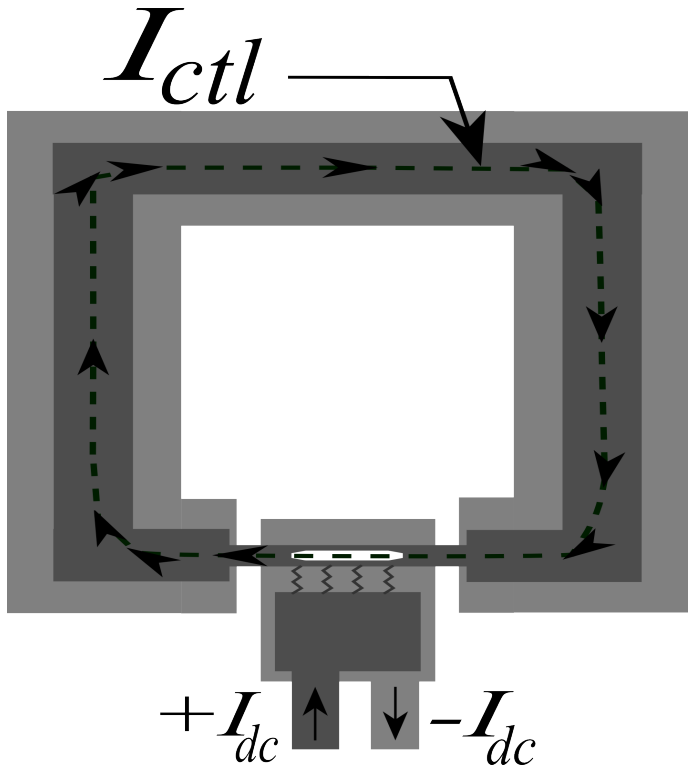

FIG. 2. Same as in Fig.1 but with a superconducting ground plane stripe (light gray) underneath the loop, except in the constriction region.

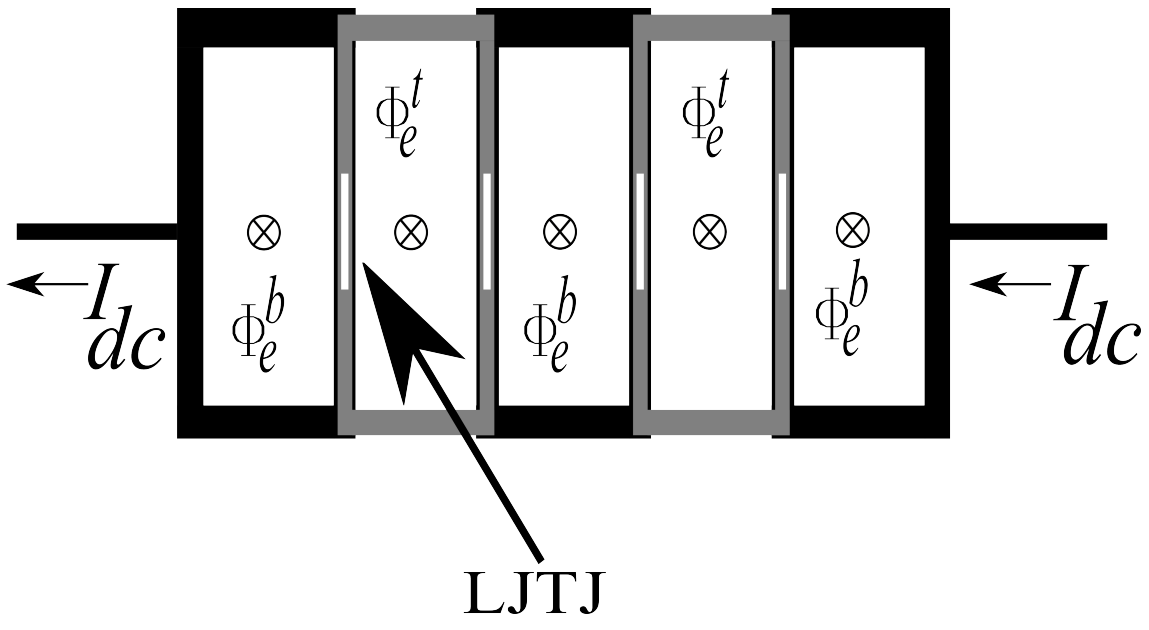

FIG. 3. Magnetic sensor formed by a series array of four LJTJs (and five loops). Each LJTJ has both the top (dark gray) and bottom (light gray) electrodes shaped in a loop.

in Josephson memory cells[26], one might use the magnetic field generated by a persistent circulating current trapped during a proper field-cooling of the superconducting loop. At the same time, the fluxoid quantization[8] applied to the superconducting loop automatically imposes a constrain[1] on the difference of the Josephson phase at the junction extremities that makes the flow-flow state more stable, so reducing the step dynamical resistance.

The magnetometer bandwidth is upper bounded by two factors. The loop is an R-L circuit, so the flux it encloses can change no faster than on a time scale L_p/R_p, where $R_p \propto \omega^2$ accounts for the frequency (and temperature) dependent losses in the loop; therefore, the maximum rate at which the circulating currents can follow the magnetic field variations is given by the condition $R_s(\omega_0) < \mu_0 \lambda \omega_0$, where R_s is the loop surface resistance and we have assumed the loop thickness larger than its penetration depth λ. The time scale is independent on the loop geometrical parameters and only depends on its material and temperature: for Niobium at LHe temperature, we conservatively[28] estimate a cutoff frequency $\omega_0 \approx 10\,GHz$. Another upper bound is set by the maximum rate at which the velocity-matching step voltage can keep track of the changes in the circulating currents; since the intrinsic response frequency of the steady-state motion of the fluxons is typically 50-100 GHz[27], this latter mechanism can be disregarded.

Flux-focusing washer loops[29] or fractional-turn loops[30] made by many loops in parallel can also be usefully employed in the magnetometer embodiment. However, the most efficient way to cut down the inductance of a superconducting element is achieved, as sketched in Fig. 2, by depositing it on top of another insulated superconductor. Fig. 2 also indicates the presence of a circulating control current due to a proper initial magnetic flux trapped during the N-S transition of the loop. Furthermore, series arrays of magnetometers can be used to increase the voltage responsivity. This is sketched in Fig. 3 in which each LJTJ has both the top and bottom electrodes shaped in a loop. This double loop configuration is two times more sensitive to external flux changes: in fact, the shielding currents in the two loops circulate in opposite directions, but also on opposite sides with respect to the tunnel barrier, so that their respective in-plane magnetic fields add each other in the barrier plane. Assuming that all the loops in the array have the same inductance per unit area, the overall voltage responsivity of an array made of N-LJTJs (and $N+1$ loops) is expected to be $V_B(N) = 2NV_B$. At the same time, the voltage noise across the array increases with $\sqrt{N}$, so that the array signal-to-noise ratio, $S_B^{-1/2}$, results improved by a factor $2\sqrt{N}$.

Long Josephson tunnel junctions were traditionally used to investigate the physics of non-linear phenomena[31]. In the last decade they have been employed to shed light on other fundamental concepts in physics such as the symmetry principles and how they are broken[32–34]. In this note I have discussed how one (or more) long Josephson tunnel junction can be integrated with a superconducting loop to provide very large sensitivity to magnetic flux. We stress that the detection of magnetic flux with LJTJs is not based on the Josephson interference, but it only relies on the fluxoid conservation in the loop. This magnetometer combines ease of use, low noise, high dynamic performance and stability against thermal drifts. At the same time, it retains the advantages of high speed and low power inherent in Josephson devices. Its linear response is particularly advantageous for magnetoencephalography and for noise thermometry. In addition, it is fully compatible with any present low- and high-T$_c$ thin film technology developed for the fabrication of Josephson junctions[35]. Further, the demand on the external electronics is reduced, although the proposed sensor can benefit, in all respects, of the accessory circuitries (input coil, modulation and feedback coil, flux transformer, tunable resonators and so on). In this light, the proposed device could conveniently compete with the present-day dc-SQUID magnetometers. Experiments are in progress.

REFERENCES

[1] R. Monaco, J. Mygind, and V.P. Koshelets, *Phys. Rev. B* **85**, 094514 (2012).

[2] R. Monaco, *Supercond. Sci. Technol* **25**, 115011 (2012).

[3] Roberto Monaco, Valery P. Koshelets, Anna Mukhortova, and Jesper Mygind, *Supercond. Sci. Technol* **26**, 055021 (2013).

[4] J. E. Mercereau and L. T. Crane, *Phys. Rev. Lett.* **12**, 191 (1964).

[5] M. Pannetier, C. Fermon, G. Le Goff, J. Simola, E. Kerr, *Science*, **304**, 1648 (2004); M. Pannetier, C. Fermon, G. Le Goff, J. Simola, E. Kerr, M. Welling, and R.J. Wijngaarden, *IEEE Trans. on Appl. Supercond.* **15**, 892 (2005).

[6] M. Weihnacht, *Phys. Status Solidi* **32**, K169 (1969).

[7] R.A. Ferrel, and R.E. Prange, *Phys. Rev. Letts.* **10**, 479 (1963); C.S. Owen and D.J. Scalapino, *Phys. Rev.***164**, 538 (1967).

[8] F. London, *Phys. Rev.* **74**, 526 (1948).

[9] T. A. Fulton and L. N. Dunkleberger, *Phys. Rev. B* **9**, 4760 (1974).

[10] M.G. Castellano, G. Torrioli, C. Cosmelli, A. Costantini, F. Chiarello, P. Carelli, G. Rotoli, M. Cirillo, R.L. Kautz, *Phys. Rev. B* **54** 15417 (1996).

[11] Eck, R., Scalapino, D. and Taylor, B. Self-detection of the ac Josephson current. *Phys. Rev. Letts.* **13**, 1518 (1964).

[12] Nagatsuma, T., Enpuku, K., Irie, F. and Yoshida, K. Flux-flow type Josephson oscillator for millimeter and submillimeter wave region. *Jou. Appl. Phys.* **54**, 3302 (1983).

[13] G. P. Pepe, G. Ammendola, G. Peluso, A. Barone, L. Parlato, E. Esposito and R. Monaco and N. E. Booth, *Appl. Phys. Letts* **77**, 447 (2000).

[14] Koshelets, V.P. and Shitov, S. Integrated superconducting receivers. *Supercond. Sci. Technol* **53**, (2000).

[15] Ozhegov, R. V, Gorshkov, K. N., Goltsman, G. N., Kinev, N. V and Koshelets, V. P. The stability of a terahertz receiver based on a superconducting integrated receiver. *Supercond. Sci. Technol* **24**, 035003 (2011).

[16] V.P. Koshelets, S.V. Shitov, A.V. Shchukin, L.V. Filippenko, P.N. Dmitriev, V.L. Vaks, A.M. Baryshev, W. Luinge, H. Golstein and J. Mygind *IEEE Trans. on Appl. Sup.* **9** 4133, (1999).

[17] Nagatsuma, T., Enpuku, K., Yoshida, K. and Irie, F. Flux-flow-type Josephson oscillator for millimeter and submillimeter wave region. II. Modeling. *Jou. Appl. Phys.* **56**, 3284 (1984).

[18] R. Kleiner, D. Koelle, F. Ludwig, and J. Clarke, *Proceedings of the IEEE* **92**, 1534 (2004).

[19] D. Koelle, R. Kleiner, F. Ludwig, E. Dantsker and J. Clarke, *Rev. Mod. Phys.* **71**, 631 (1999).

[20] A.L. Pankratov, *Phys. Rev. B* **65**, 054504 (2002); A.L. Pankratov, *Appl. Phys. Letts* **92**, 082504 (2008).

[21] P.N. Dmitriev, I.L. Lapitskaya, L.V. Filippenko, A.B. Ermakov, S.V. Shitov, G.V. Prokopenko, S.A. Kovtonyuk, and V.P. Koshelets, *IEEE Trans. Appl. Supercond* **13**, 107-110 (2003).

[22] Valery P. Koshelets and Jesper Mygind, in *Studies of High Temperature Superconductors*, , edited by A.V. Narlikar, NOVA Science Publishers, New York, **39**, 213-244 (2001).

[23] D. Rogovin and D. J. Scalapino, Fluctuation phenomena in tunnel junctions, Ann. Phys., vol. 86, pp. 190, (1974).

[24] Mygind, J., Koshelets, V.P., Samuelsen, M.R. and Sobolev, A.S. The Submm Wave Josephson Flux Flow Oscillator; Linewidth Measurements and Simple Theory. IEEE Transactions on Appiled Superconductivity **15**, 968971 (2005).

[25] Cristiano, Frunzio, Monaco, P. Investigation of subgap structures in high-quality Nb/AlOx/Nb tunnel junctions. *Phys. Rev. B* **49**, 429 (1994).

[26] Zappe, H. Memory-cell design in Josephson technology. IEEE Transactions on Electron Devices **27**, 18701882 (1980).

[27] T.V. Rajeevakumar, *App. Phys.Letts.* **39**, 439 (1981).

[28] R. Monaco, A. Andreone, F. Palomba, *Jou. Appl. Phys.* **88**, 2898 (2000).

[29] J.M. Jaycox and M.B. Ketchen, *IEEE Trans. Magn.* **17**, 403 (1981).

[30] J.E. Zimmerman, *Jou. Appl. Phys.* **42**, 4483 (1971).

[31] A. Barone and G. Paternò, *Physics and Applications of the Josephson Effect* (Wiley, New York, 1982).

[32] R. Monaco, J. Mygind, M. Aaroe, R.J. Rivers and V.P. Koshelets, *Phys. Rev. Lett.* **96**, 180604 (2006).

[33] R. Monaco, M. Aaroe, J. Mygind, R.J. Rivers, and V.P. Koshelets, *Phys. Rev. B* **77**, 054509 (2008).

[34] A.V. Gordeeva and A.L. Pankratov, *Phys. Rev. B* **81**, 212504 (2010).

[35] M. Gurvitch, M. A. Washington, and H. A. Huggins, *App. Phys. Letts.* **42**, 472 (1983); H. Hilgenkamp and J. Mannhart, *Rev. Mod. Phys.* **74**, 485 (2002).